

SONANCE



DIGITAL AMPLIFIER DATA SHEET

16-50 MULTI-CHANNEL POWER AMPLIFIER

TECHNICAL SPECIFICATIONS

SKU	93546 (North America); 93547 (International)
UOM	Each
Number of Channels	16 (8 Stereo Zones)
RMS per Channel @ 8 Ohms	50 watts
RMS per Channel @ 4 Ohms	100 watts
RMS per Channel Bridged @ 8 Ohms	200 watts
Frequency Response	10Hz-22kHz
Voltage Trigger Input	3-30V
Audio Sense Threshold	1.5 mV
Crossover Filter	OFF/80Hz/120Hz
AC Voltage	100-240V @ 50/60Hz
AC Fuse	5A (T5AL - 250V)
Dimensions + Feet (WxHxD)	17.2" x 2.2" x 12.3" (436mm x 55mm x 312.5mm)
Dimensions + Rack Ears, No Feet (WxHxD)	19" x 1.75" x 12.3" (482mm x 44mm x 312.5mm)
Rack Space Requirement	1U - Full Width
Shipping Weight	13.8 lbs. (6.3kg)

DIMENSIONAL DRAWINGS

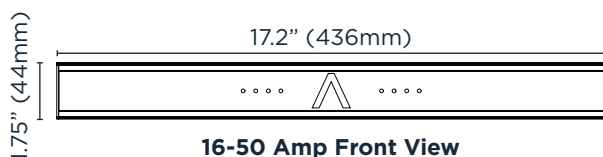

16-50 Amp Back View
Depth: 12.3" (312.5mm)

ASSOCIATED PRODUCTS

AMPLIFIERS

Digital 8-50	93544
DSP 2-150 MKII	93378
DSP 8-130 MKII	93331
DSP 2-750 MKII	93379

LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademark of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com • 09.20.2022